

# Solartron 7828 insertion density transmitter

## the complete density solution

Data sheet  
IP7828

### Advantages of the 7828

- ▶ Fully integrated 'fit and forget' digital density measurement for monitoring and control
- ▶ Direct analog (4-20mA) output of density, base density, or special calculation (% solids, °API, Specific Gravity, etc.)
- ▶ RS485/Modbus communications
- ▶ Low maintenance
- ▶ PC configuration tool for diagnostics and data logging

### Description

The 7828 insertion density transmitter is a sensor for continuous real time measurement of fluid density in pipelines, open or closed tanks.

It can be used in process control where density is the primary control parameter for the end product, or as an indicator of some other quality control parameter such as % solids or % concentration.

### Typical industries include:

- ▶ Oil and petrochemical
- ▶ Brewing
- ▶ Food
- ▶ Pharmaceutical
- ▶ Minerals processing (clays, carbonates, silicates, etc.)

### Applications include:

- ▶ Interface detection in multi-product pipelines
- ▶ Mass flow when used in conjunction with a volumetric flow meter
- ▶ Sugar refining (°Brix)
- ▶ Wort gravity
- ▶ Slurries
- ▶ Coatings
- ▶ Evaporator control
- ▶ Product mixing
- ▶ End point detection in batch reactions
- ▶ Solvent separation



## Principle of operation

All Solartron Mobrey liquid density transducers operate on the same general principle and can be likened to that of a mass spring system. When a mass on a spring is displaced and released it will oscillate at a natural frequency

until it comes to a rest due to viscous damping. When a driving force is applied to the mass to overcome the effect of damping, the vibration is maintained in resonance.

As the measured product density changes, it in turn changes the vibrating mass of the density transducer, which is then detected by a change in the resonant frequency.

## Features

Its features include a configured microprocessor-based electronic module which places the full signal conditioning, calculation and diagnostic facilities within the transmitter itself. Remote electronics are not required for signal processing.

The 7828 is **factory calibrated** and no further calibration is necessary. The calibration is traceable to **UK National Standards** through Solartron Mobrey's own UKAS approved laboratory.

It measures line density and temperature, and calculates base density using API tables or a matrix referral as well as parameters such as °API, °Brix, %solids, %mass, %volume and Specific Gravity (there is even a user-defined quadratic equation calculation available).

Any of these parameters can be used to drive the integral analog (4-20mA) output, enabling it to be used as the process variable in control applications, without the need for additional processing electronics.

All measurements are available digitally via the built-in RS485/Modbus communications interface, for integration into plant data systems.


The design of the 7828 ensures accurate and reliable results. Maintenance is minimal, leading to lower overall operating costs.

## Installation


Solartron can provide a variety of installation accessories, such as weldolets, for direct pipeline insertion, or flow-through chambers, which provide the optimum environment for the 7828.

Ask for brochure IP7004 for more details.

### Flange connection details

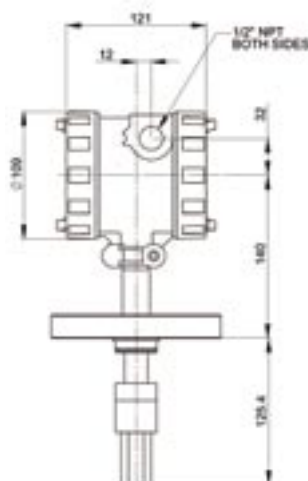

### Cone seat connection details

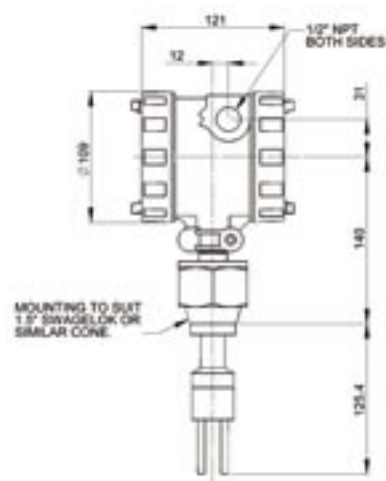

Part Number Identification

|      |   |   |   |   |   |   |   |   |                              |
|------|---|---|---|---|---|---|---|---|------------------------------|
| Code | Product   |   |   |   |   |   |   |   |                              |
| 7828 | 7828 Insertion Density Transmitter                            |   |   |   |   |   |   |   |                              |
| Code | Material  |   |   |   |   |   |   |   |                              |
| A    | 316 Stainless Steel, standard finish                          |   |   |   |   |   |   |   |                              |
| C    | 316 Stainless Steel, electro-polished                         |   |   |   |   |   |   |   |                              |
| F    | 316 Stainless Steel, PTFE laminated tines                     |   |   |   |   |   |   |   |                              |
| V    | 304 Stainless Steel, standard finish                          |   |   |   |   |   |   |   |                              |
| T    | Titanium, standard finish                                     |   |   |   |   |   |   |   |                              |
| U    | Hastelloy B2, standard finish                                 |   |   |   |   |   |   |   |                              |
| E    | Hastelloy C22, standard finish                                |   |   |   |   |   |   |   |                              |
| D    | Hastelloy C22, electro-polished                               |   |   |   |   |   |   |   |                              |
| G    | Hastelloy C22, PTFE laminated tines                           |   |   |   |   |   |   |   |                              |
| H    | Monel 400, standard finish                                    |   |   |   |   |   |   |   |                              |
| J    | Monel 400, electro-polished tines.                            |   |   |   |   |   |   |   |                              |
| L    | Monel 400, PTFE laminated tines                               |   |   |   |   |   |   |   |                              |
| Z    | Special: Use this letter code during quotation request.       |   |   |   |   |   |   |   |                              |
| Code | Amplifier System  |   |   |   |   |   |   |   |                              |
| C    | Advanced: 4-20mA output, ATEX EEX d IIC T4, <200°C            |   |   |   |   |   |   |   |                              |
| D    | Advanced: 4-20mA output, CSA Class 1 Div 1 Groups C&D, <200°C |   |   |   |   |   |   |   |                              |
| Code | Amplifier Housing   |   |   |   |   |   |   |   |                              |
| A    | Aluminium alloy [T4 (-40°C < Ta < +110°C)]                    |   |   |   |   |   |   |   |                              |
| Code | Process Connections   |   |   |   |   |   |   |   |                              |
| A    | 2" ANSI 150 RF  |   |   |   |   |   |   |   |                              |
| B    | 2" ANSI 300 RF  |   |   |   |   |   |   |   |                              |
| C    | 2" ANSI 600 RF  |   |   |   |   |   |   |   |                              |
| D    | 2" ANSI 900 RF  |   |   |   |   |   |   |   |                              |
| F    | 2" ANSI 1500 RF   |   |   |   |   |   |   |   |                              |
| G    | 50 mm DIN 2527 DN 50/PN 40                                    |   |   |   |   |   |   |   |                              |
| H    | 50 mm DIN 2527 RF DN 50/PN 100                                |   |   |   |   |   |   |   |                              |
| R    | 50 mm DIN 2527 DN 50/PN 16                                    |   |   |   |   |   |   |   |                              |
| J    | 2" Ladish Triclamp (Hygienic)                                 |   |   |   |   |   |   |   |                              |
| K    | 3" Ladish Triclamp (Hygienic)                                 |   |   |   |   |   |   |   |                              |
| L    | 2" IDF (Hygienic)   |   |   |   |   |   |   |   |                              |
| M    | 3" IDF (Hygienic)   |   |   |   |   |   |   |   |                              |
| N    | 1.5" Cone Seat Compression Fitting                            |   |   |   |   |   |   |   |                              |
| Z    | Special: Use this letter code during quotation request.       |   |   |   |   |   |   |   |                              |
| Code | Stem Length   |   |   |   |   |   |   |   |                              |
| A    | 0 mm : no stem extension and with standard spigot             |   |   |   |   |   |   |   |                              |
| Z    | Special: Use this letter code during quotation request.       |   |   |   |   |   |   |   |                              |
| Code | Default Configuration (Amplifier Outputs)                     |   |   |   |   |   |   |   |                              |
| A    | API Degrees (Americas)  |   |   |   |   |   |   |   |                              |
| B    | Base density to API tables (metric configuration)             |   |   |   |   |   |   |   |                              |
| C    | Line Density only   |   |   |   |   |   |   |   |                              |
| D    | General process including matrix (user data required)         |   |   |   |   |   |   |   |                              |
| Z    | Special   |   |   |   |   |   |   |   |                              |
| Code | Calibration Type  |   |   |   |   |   |   |   |                              |
| L    | Density at 20°C.  |   |   |   |   |   |   |   |                              |
| Z    | Special.  |   |   |   |   |   |   |   |                              |
| Code | Calibration Boundary  |   |   |   |   |   |   |   |                              |
| A    | Free Stream   |   |   |   |   |   |   |   |                              |
| B    | 2" schedule 40 boundary                                       |   |   |   |   |   |   |   |                              |
| C    | 3" schedule 40 boundary                                       |   |   |   |   |   |   |   |                              |
| D    | 2" schedule 80 boundary                                       |   |   |   |   |   |   |   |                              |
| E    | 3" schedule 80 boundary                                       |   |   |   |   |   |   |   |                              |
| 7828 | A   | C | A | A | A | B | L | B | Typical ordering information |

## Diagnostic Tool

ADView is a software package provided by Solartron Mobrey to enable you to:

- ▶ Configure our density and viscosity transmitters.
- ▶ View and save data from them.
- ▶ Check that they are functioning correctly.

ADView is installed on a PC and interacts with the 7828 insertion

density transmitter through one of the PC's standard serial (RS-232) ports.

ADView provides many useful facilities, such as:

- ▶ Setting up serial link to communicate with the 7828 insertion density transmitter.
- ▶ Configuring the 7828 insertion density transmitter.

- ▶ Displaying data in real time, or as a graph.
- ▶ Logging data to a file.
- ▶ Verifying correct operation of the system, and diagnosing faults.
- ▶ Loading or storing Modbus register values.
- ▶ Read/write to individual Modbus registers.

## Specification

|                                |   |
|--------------------------------|---|
| Density operating range:       | 0 - 3g/cc (0 - 3000kg/m <sup>3</sup> ) (0-187.4 lb/ft <sup>3</sup> )  |
| Calibrated range:              | 0.6 - 1.25g/cc (600-1250kg/m <sup>3</sup> ) (38.5-80.25 lb/ft <sup>3</sup> )  |
| Accuracy:                      | ±0.001g/cc (±1.0kg/m <sup>3</sup> ) (±0.06 lb/ft <sup>3</sup> )   |
| Repeatability:                 | ±0.0001g/cc (±0.1kg/m <sup>3</sup> ) (±0.006 lb/ft <sup>3</sup> )   |
| Temperature range:             |   |
| Process                        | -50°C to +200°C (-60°F to +392°F)   |
| Ambient                        | -40°C to +85°C (-40°F to +185°F)  |
| Electronics surface            | -40°C to +110°C (-40°F to +230°F) (ATEX)  |
| Pressure range (max working)   | 207bar (3000psi)  |
| Viscosity range:               | up to 20,000cP  |
| Temperature sensor (integral): | PT100 BS1904 Class B, DIN 43760 Class B   |
| 4-20mA analog output:          | Isolated, not self-powered  |
| Controlled by:                 | Any user-selected parameter   |
| Accuracy:                      | ±0.1% reading, ±0.05%FS @20°C (68°F)  |
| Repeatability:                 | ±0.05%FS over range -40°C to +85°C (-40°F to +185°F)  |
| RS485 Interface:               | 9600baud, Modbus (Modicon)  |
| Electrical connection          | Screw terminal, cable entry to suit 1/2" NPT gland (20mm adaptor available)   |
| Environment:                   | IP66  |
| Power Supply:                  | 20 to 28Vdc, 35-45mA  |
| Wetted materials:              | Stainless Steel, Hastelloy, Monel, Titanium   |
| Tine finish:                   | Standard, PTFE coated or Electro-polished   |
| Connections:                   | ANSI 150 to 600RF; DIN 50 PN40 and PN100<br>1.5" compression; IDF and RJT hygienic  |
| Approvals:                     | ATEX           II 2G EEx d IIC T4<br>CSA            Class 1, Division 1, Group C & D T4<br>EMC:           EN50081-2, EN50082-2 (Industrial) |

### Solartron Mobrey Limited

158 Edinburgh Avenue Slough  
Berks UK SL1 4UE  
Tel: 01753 756600  
Fax: 01753 823589  
e-mail: sales@solartron.com  
www.solartronmobrey.com

### Solartron Mobrey

19408 Park Row, Suite 320,  
Houston TX 77084 USA  
Tel: 281 398 7890  
Fax: 281 398 7891  
e-mail: sales@solartron.com  
www.solartronusa.com



Solartron Mobrey GmbH  
Solartron Mobrey Ltd  
Solartron Mobrey sp z o o  
Solartron Mobrey AB  
Solartron Mobrey SA  
Solartron Mobrey SA-NV

Deutschland tel: 0211/99 808-0  
China tel: 021 6353 5652  
Polska tel: 022 871 7865  
Sverige tel: 08-725 01 00  
France tel: 01.30.17.40.80  
Belgium tel: 02/465 3879



The right is reserved to amend details given in this publication without notice